


## Solo / Big / Super Niedervolt

Light source: Halostar ECO (Osram), Socket: GY6.35

The lamp has been designed and built in accordance with applicable harmonised standards and other technical specifications. It is therefore state-of-the-art and ensures safe operation. The lamp may only be used for the intended purpose.

### Front and top view

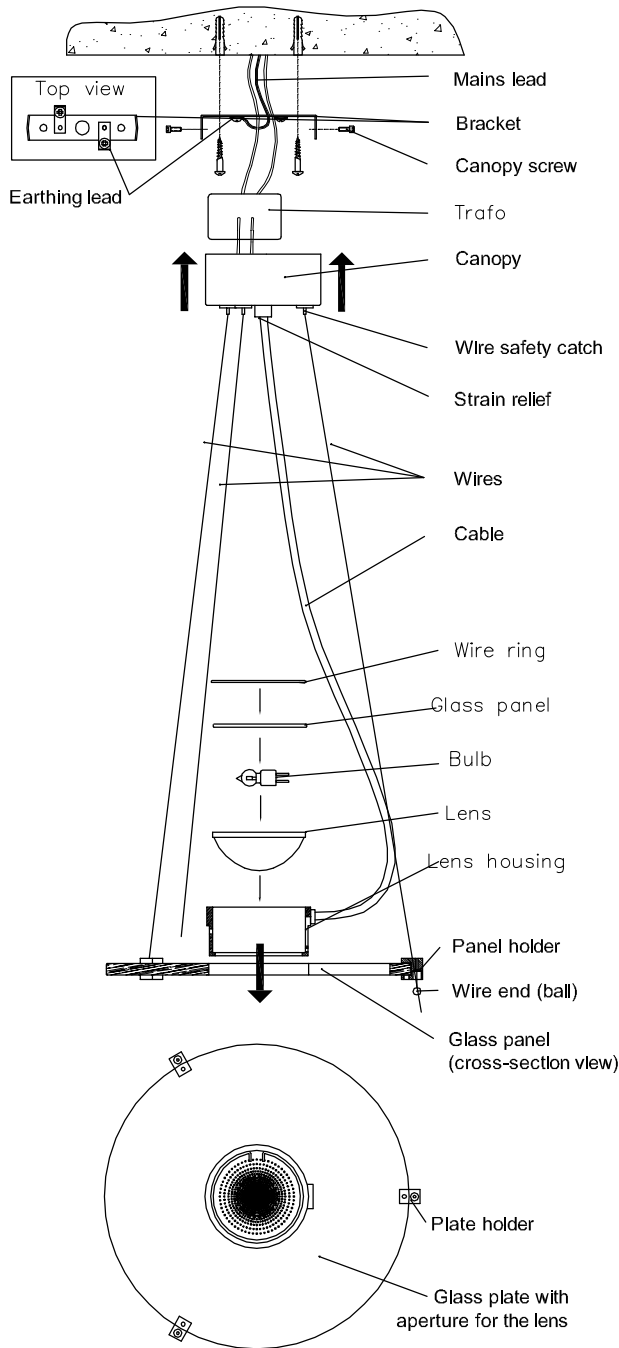

### Note:

Position the lamp at eye level or just slightly higher. This prevents being dazzled by the light. The safety distance from the ceiling and from, e.g. a table below the lamp, must be a minimum of 0.5 m.


### ATTENTION!

The connection cable must be isolated from the mains before assembly.

### Assembly:

It is recommended that assembly is implemented by a specialist company. We ask for your understanding that we can only offer a guarantee if assembly is implemented correctly.


- ① Attach the bracket with dowels and screws to the ceiling.
- ② Determine the required pendant length and shorten the wires and the cable. The cable and the wires should be left approx. 15cm longer.
- ③ Pass the wire through the panel holder so that the ball is engaged.
- ④ Connect the earth conductor (yellow/green) to the earthing lead on the canopy bracket.
- ⑤ Connect the supply cable to the primary side of the transformer. Then guide the lamp cable through the canopy and connect it to the secondary side of the transformer.
- ⑥ Push the canopy over the bracket and fasten the canopy with the two canopy screws.
- ⑦ Push the 3 wires through the wire holder. To align the light, push/pull the individual wires in/out of the wire holder until positioned as required (see graphic).
- ⑧ Lock the cable in place with the strain relief.
- ⑨ Insert the lens and bulb.

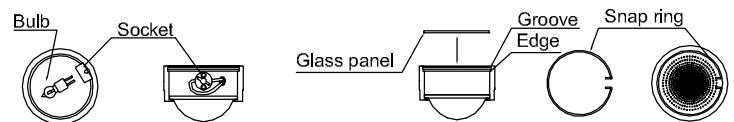

### Bulb Installation:

- ① Insert the lens (with the curve facing downwards) in the lamp head.
- ② Press the bulb with both pins into the two holes of the socket. Do not touch the glass bulb itself during insertion.
- ③ Place the glass panel with the printed side upwards on the inner edge of the lens housing and insert the snap ring in the groove.

### Wire holder principle

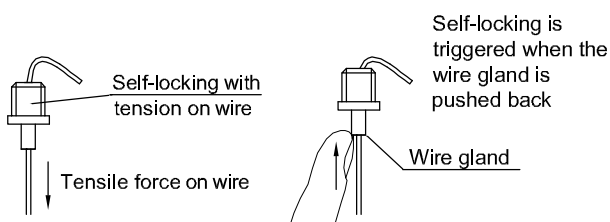

### Dimming:

The lamp can be dimmed with a trailing edge-phase dimmer. The total Watt value of all luminaires must not exceed the maximum Watt value of the dimmer.

### Cleaning:

We recommend cleaning the lamp with a soft, dry cloth. A commercial glass cleaner can be used to clean the lens.