


Aufbau Deckenbaldachin

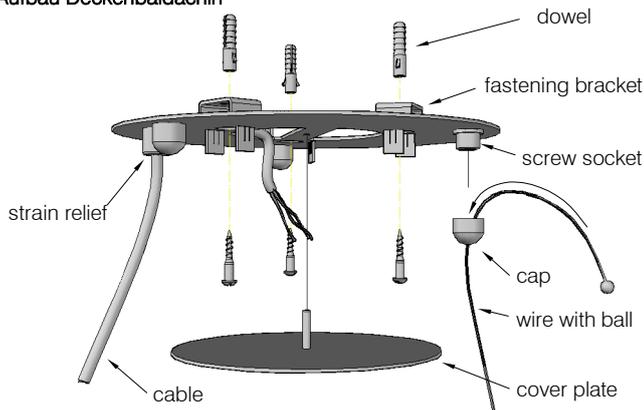

Note:

The safety distance from the ceiling, and from objects or persons below the lamp, must be a minimum of 0.5 m when swivelled out.

ATTENTION!


The connection cable must be isolated from the mains before assembly.

Assembly:


It is recommended that assembly is implemented by a specialist company. We ask for your understanding that we can only offer a guarantee if assembly is implemented correctly.

1. Determine the position of the lamp in the room and then place the lamp on a clean, soft surface on the floor.
2. Align the centerpoint of the lamp with the ceiling and fasten the mounting plate of the canopy to the ceiling.
3. Unscrew the caps on the canopy plate and pass the balls of the wire ends through them. Then screw the caps back on.
4. Insert the wire ends into the wire holder of the lamp and pull the wire. Insert the lamp cable from below through the strain relief of the canopy.
5. Shorten the cable to the required length and then connect it to the supply lead.
6. Screw the cover plate to the mounting plate. Make sure you do not continue to screw it down once the plate has come into contact with the mounting plate contact points.
7. Align the lamp with the help of a spirit level. Please note the graphic for the wire holder operating principle.
8. Adjust the cable length and lightly tighten the locking screw of the strain relief.
9. Mount the glass elements with the countersunk screws on the brackets, they can be turned for the assembly step.

Montage Glaselemente

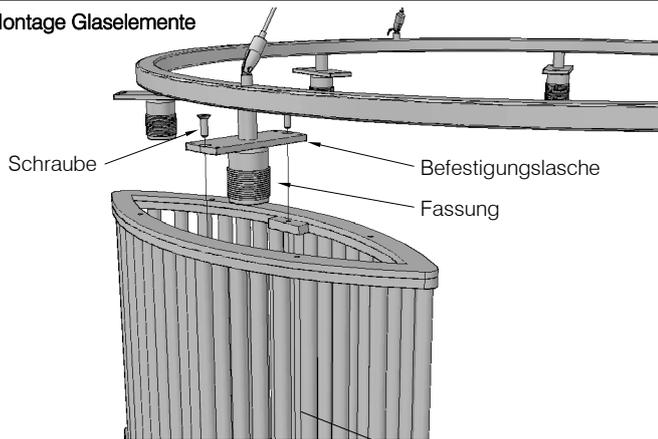

Seilhalter

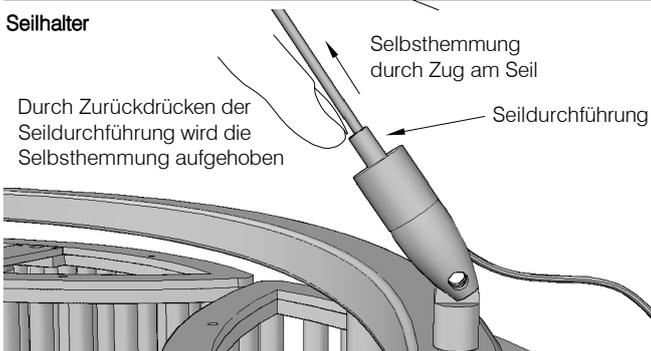

Dimming:

The lamp can be dimmed with any commercial dimmer.

Cleaning:

Only clean the lamp when it is completely cooled down. We recommend cleaning the lamp with a soft, dry cloth. A commercial glass cleaner can be used to clean the glass rods.

Lights: Ocular LED - Pendant lights - Chandelier - Wall lights

These operating instructions are exclusively for these products. It contains important information on commissioning and installation handling the luminaire. Therefore pay attention to these operating instructions, even if you use this product to a third party pass on.

Therefore, it is important that you keep this manual for future reference.

1. Introduction

You have purchased a product from the company "Licht im Raum Dinnebier GmbH", which was built according to the current state of technology. The luminaire meets the requirements of the applicable European and national directives. In order to maintain the condition of the product and to ensure safe operation, you must observe these operating instructions as a user!

2. Safety instructions

- Damage caused by not observing these operating instructions will void the warranty!
- We accept no liability for consequential damages!
- In the event of damage to the luminaire, commissioning is strictly prohibited.
- Do not allow children to be left unattended in the area of the lights or other electrical equipment.
- During operation, the lamp can become hot. Keep min. 0.5m distance to ceiling and to all other walls and objects.
- Do not expose the luminaire to extreme heat or to an open flame.
- The entire product may not be altered or altered. Changes to the luminaire will void the warranty.
- The type plate must not be removed.

3. Intended use

- The luminaire is designed for use in dry and protected indoor areas.

This product is for lighting purposes only and may:

- only be operated with a voltage of 230V ~ 50Hz.
- only be connected according to protection class I (one).
- only be operated in the correct and fixed state.
- are not subjected to strong mechanical stress or heavy soiling.

4. Before installation / commissioning

- The luminaire may only be operated outside the packaging.
- Carefully remove the lamp from its packaging.
- Before using the luminaire, make sure that the product hasn't been damaged on its transport route.
The luminaire may not be operated if the electrical parts are damaged.
Repairs may only be carried out by a specialist electrician.
- Keep packaging material away from children and pets. Suffocation!

5. Installation / Commissioning

- This product may only be installed by qualified electricians.
- Before installation, the connecting cables on the building side must be disconnected from voltage and secured against being switched on again. To do this, unscrew the appropriate fuse devices from the house installation.
- Ensure that the substructure or the ceiling construction is suitable for carrying the weight of the luminaire permanently and reliably.
- Use suitable fixing material to secure the luminaire. Make sure that no wires are damaged.
- Do not bend the cable; please ensure that the cables and connectors are free of tension and torsional forces. Protect all cables and insulation from possible damage.
- Before commissioning, check the correct connection again.

6. Technical specifications

230 V AC ~, 50 Hz, IP 40

7. Care

- Before you carry out any cleaning or care measures on the product, first switch the entire product free of voltage and allow it to cool down.
- Clean the product regularly - only with a soft and lint-free cloth. Please observe the enclosed instructions.

8. Disposal

- Electrical waste must be supplied to public collection points and not allowed be disposed of as household waste.