


This lamp contains a light source with an energy efficiency class <D>

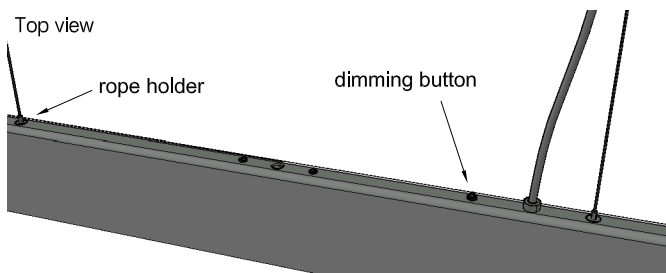

Note:

The distance to the ceiling as well as to objects and persons under the luminaire must be at least 0.5m.


ATTENTION!

Before mounting, the connecting cable must be de-energised.

Installation:

It is recommended that the installation be carried out by a specialist company. Please understand that we can only give a guarantee if the installation has been carried out correctly.

Canopy assembly

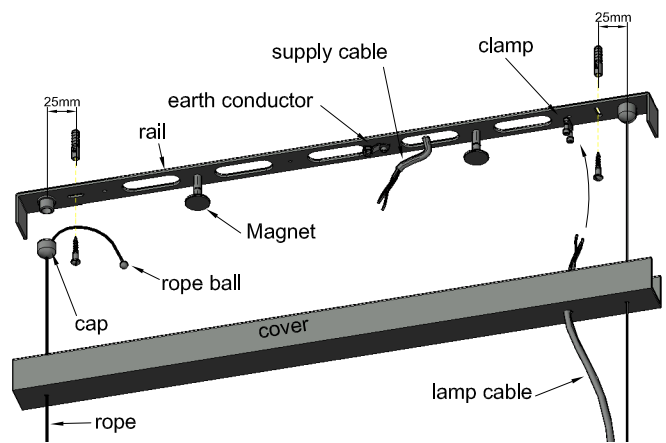

1. Determine the position of the luminaire in the room or aligned on the table.
2. Plumb the position of the rope holders to the ceiling. **ATTENTION!** The drill holes are offset 25mm inwards from the rope. See drawing "Canopy assembly".
3. Attach the rail of the canopy to the ceiling.
4. Pull the ropes through the cap until the rope ball is in the cap. Screw the cap onto the holder.
5. Shorten the cables to the desired pendulum height. Insert the ends of the cables into the cable holders of the lamp and align the light wires. The cable must not be longer than 3 cm in the luminaire.
6. Push the lamp cable through the cover of the canopy from below.
7. Then shorten the cable to the desired length and connect it to the supply cable. Connect the green/yellow earth conductor of the supply cable to the earth terminal.
8. Secure the chandelier cable with the clamp.
9. Adjust the chandelier with the help of a spirit level. Attention. The cables must not be pushed more than 3 cm into the chandelier. Observe the the illustration for handling the rope holders.

Dimming:

The chandelier is equipped with a push-button. Press briefly: On / Off switching. Press and hold: Dimming.

Synchronizing the light circuits (lamp switched on):

Step 1: Press and hold the button for more than one second (long PUSH) to dim. All LEDs start to dim up or down.

Step 2: Press the button again, but only briefly (<1s). This means that all LEDs go out.

Step 3: Another long press (more than a second) will sync the drivers and the LEDs will work together again.

Cleaning:

It is recommended to clean the lamp with a soft, dry cloth.

