


# **Assembly instructions**

# Stilio Uno 240 / 300


Light source: 230V, max. 150W, Socket: E27


The lamp has been designed and built in accordance with applicable harmonised standards and other technical specifications. It is therefore state-of-the-art and ensures safe operation. The lamp may only be used for the intended purpose.

## **Frontansicht**

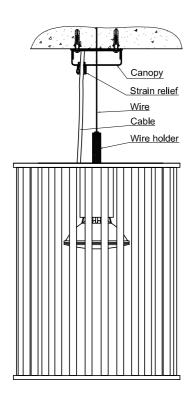

# Mounting the ceiling box





#### Note:

Position the lamp at eye level or just slightly higher. This prevents being dazzled by the light. The safety distance from the ceiling and from, e.g. a table below the lamp, must be a minimum of 0.5 m.

#### ATTENTION!

The connection cable must be isolated from the mains before assembly.

## Assembly:

It is recommended that assembly is implemented by a specialist company. We ask for your understanding that we can only offer a guarantee if assembly is implemented correctly.

- ①Feed the supply cable through the mounting plate and fasten it with the dowel and screw to the ceiling.
- ②First insert the attachment rope through the cap and then through the housing cover, the ball should lie in the cap.
- ③ Screw the cap onto the threaded part.
- Now insert the rope through the rope holder and pull it through the rope holde until the luminaire hangs at the desired height. (see handling cable holder)
- ⑤ Pass the cable through the canopy and trim it. Then connect this to the supply cable using the luster terminal.
- 6 Connect the ground wire (yellow / green). Slide the housing cover over the mounting plate and fasten ity with the grub
- (7) Fix the cable with the strain relief.
- 8 Insert the bulb.

### Dimming:


The light is dimmable, depending on the light source. Please read the instructions of the lamp manufacturer.

# Cleaning:


Only clean the lamp when it is completely cooled down and the mains plug is disconnected.

We recommend cleaning the lamp with a soft, dry cloth. A commercial glass cleaner can be used to clean the glass rods.

## Wire holder principle







Lightly tightening the

